



- 2 UART , 921600 bps
- 2 SPI 20 Mbps 1 I2S 1 QUAD/DUAL/Standard SPI
- 9bit
- 2 I2C 1.4 Mbps
- 1 SCC/SCD ISO7816 /
- 1 10bit 1Msps ADC 10 4 2
- 1
- 30 GPIO
- 1 DMA 6
- 1 32 RTC


— SOP8 (3.9mm×4.9mm)

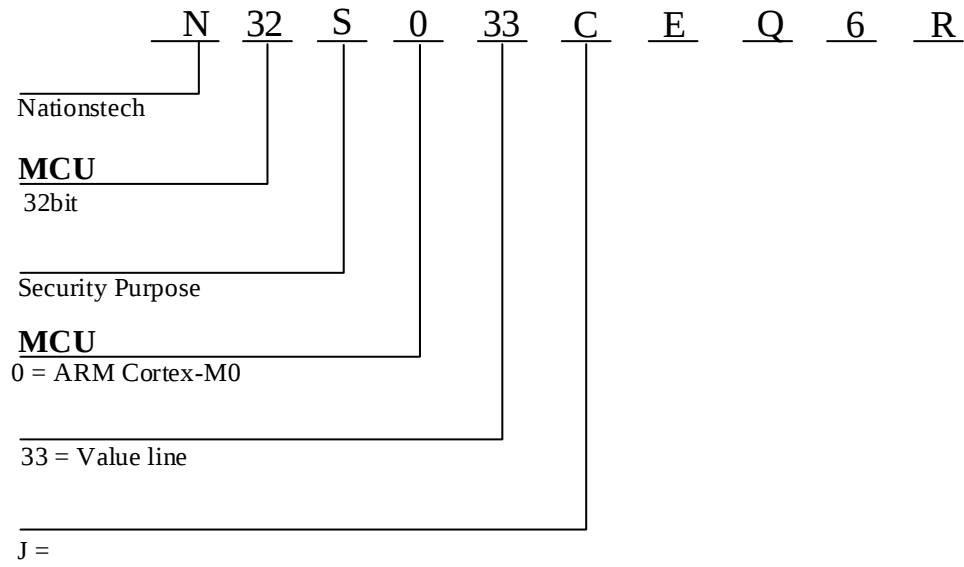

2_{1/0}


		N32S033	
FLASH	KB	512	
SRAM	KB	32+1	
CPU		ARM Cortex-M0 @80MHz	
		1.8 ~ 5.5V / -40 ~ 85	
	Timer	5	2
	SysTick	1	
	RTC	1	
	USB	1	0
	SPI/I2S	2/1	1/0

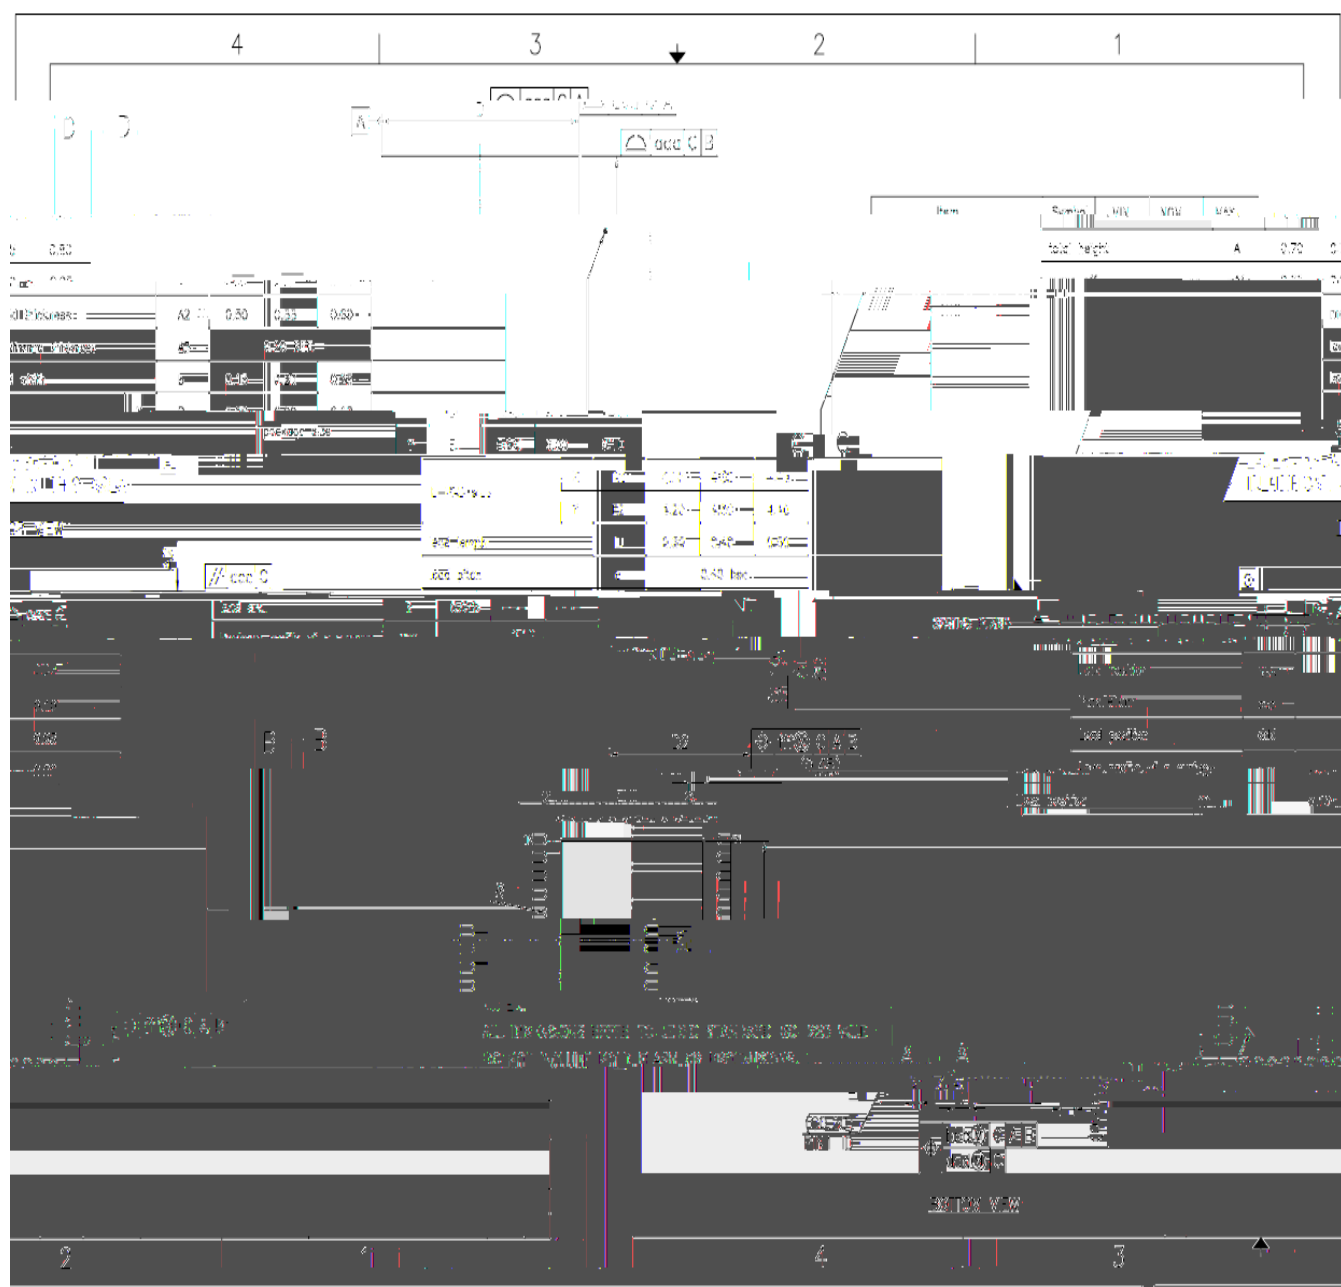



3.2 “ ”

DS_N32S033

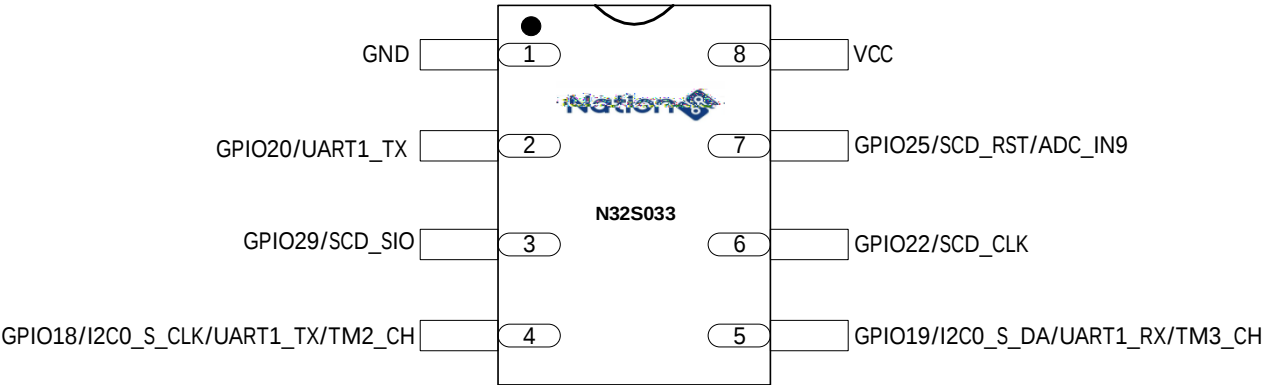

DS_N32S033

3.2 “ ”

